



Vertical Vessel
Without Mesh Mist Eliminator
D-2002
Design and Principles



Content

1 Description

2 Design Procedure

- 2.1 Select proper Orientation
- 2.2 Select and Size proper Inlet Device, Inlet and Outlet ID
- 2.3 Calculate Vessel Diameter
- 2.4 Calculate Vessel Height
- 2.5 Select and Size Manholes, Vent, Drain, Vortex Breaker
- 2.6 Select a well-designed mist eliminator pad




Description

The objective of this vessel is to separate liquid particle from the gas. The vessel is located after Heat exchanger to separate condensate produced from gas stream.

Operating Parameters

Operating temperature	165	°C	Operating pressure	25,8	bar g
Liquid Outlet					
Liquid flow	24317	kg/h	Liquid density	903	kg/m ³
Vapor Outlet					
Gas flow	440676	kg/h	Gas density	9,78	kg/m ³
Gas molecular weight	13,17	kg/kmol			

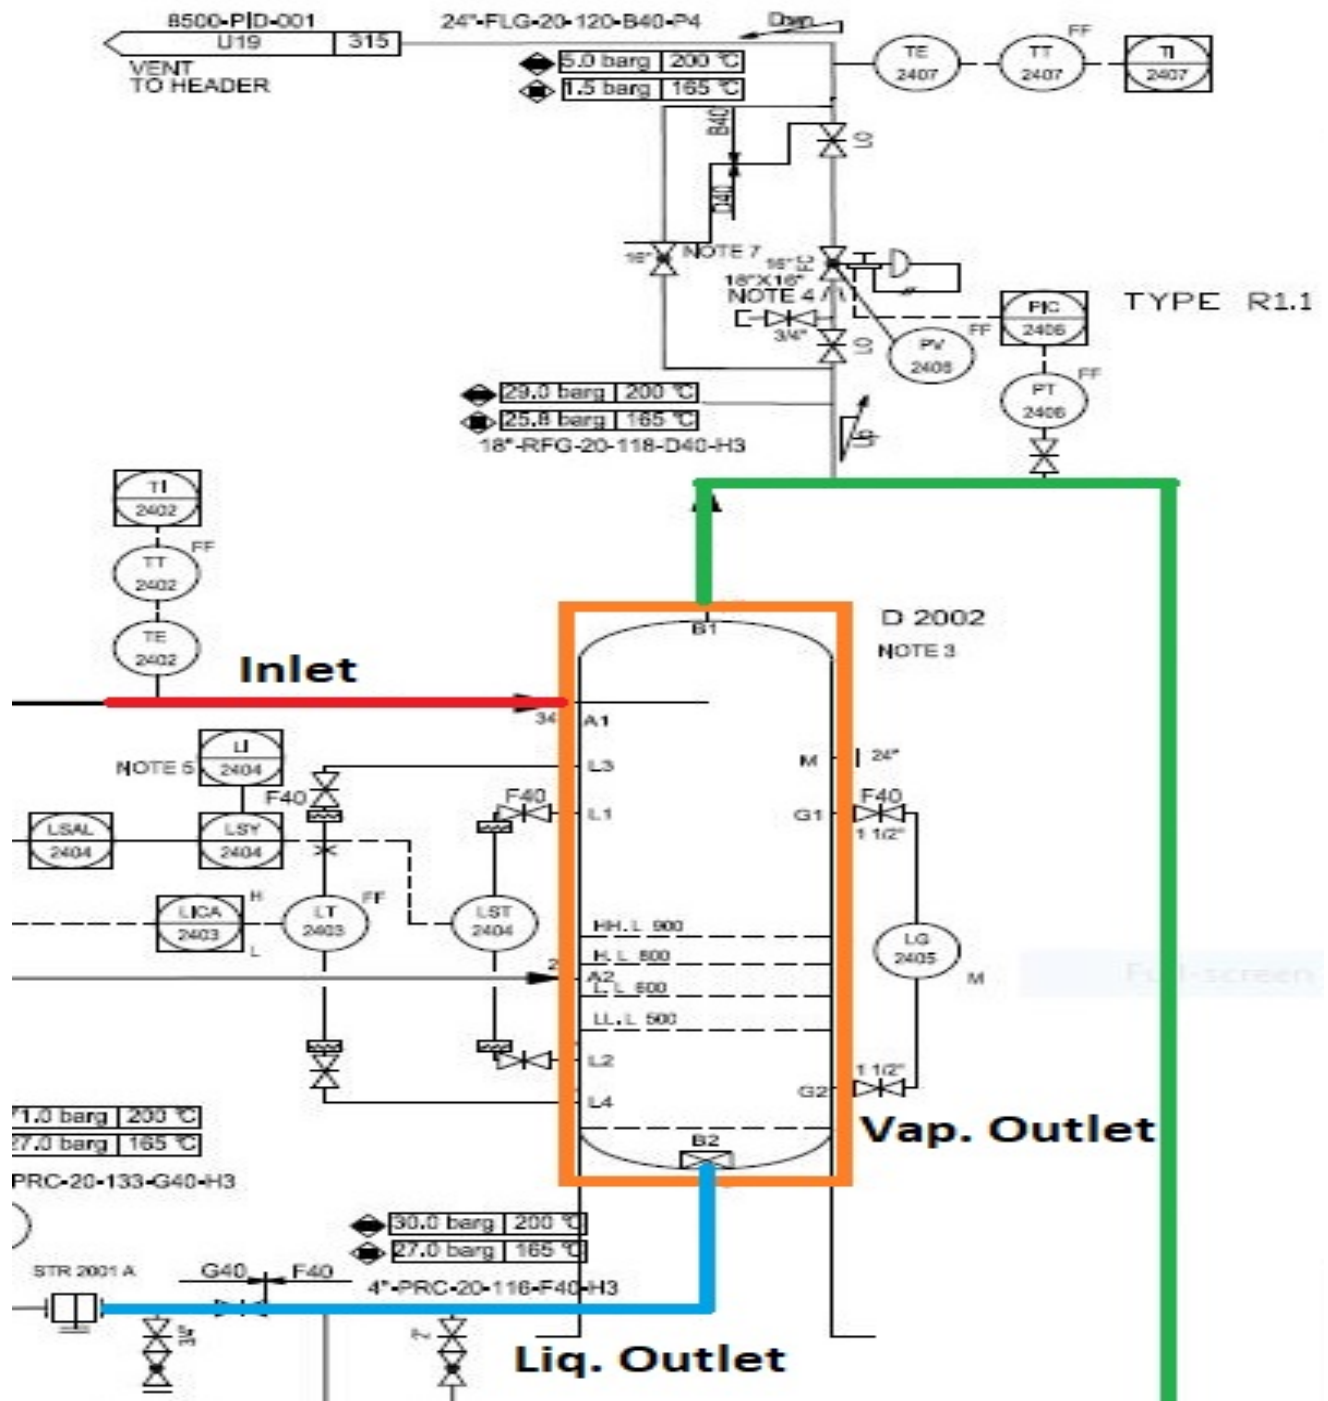



Design Procedure

1. Select proper Orientation
2. Select and Size proper Inlet Device, Inlet and Outlet ID
3. Calculate Vessel Diameter
4. Calculate Vessel Height
5. Select and Size Manholes, Vent, Drain, Vortex Breaker

1st Step: Select proper orientation

Since the application is gas dominant a vertical vessel is selected.

Since no downstream requirement is emphasized no de-mister pad is needed.

Separator Type:	No Demisting Internals	Mesh Pad	Vert. Vane Pack	Horiz. Vane Pack	In-line Vane Pack	Axial Flow Multi-Cyclone	Horiz. Flood Mesh/Vane	Vert. Flood Mesh/Vane	Flood Mesh/ Multi-Cyclone
Gas Handling									
Capacity	Low	Moderate	High	Very High	Very High	Very High	Very High	Very High	Very High
Turndown Capability	∞	4:1	3:1	3:1	3:1	2:1	4:1 or higher	4:1 or higher	4:1 or higher
Liquid Removal Efficiency									
Efficiency Overall	Low	Very High	Moderate	Low/Mod	Low/Mod	High	Moderate	High	High
Efficiency – Fine Mist	Very Low	Very High	Moderate	Moderate	Moderate	High-Very high	Very High	Very High	Very High
Liquid Handling Capacity									
Slugs	High	High	High	Very High	Very Low	High	High	High	High
Droplets	High	High	Moderate	Moderate	Low	High	High	High	High
Fouling Tolerance									
Particulate	Very High	Low	Moderate	Moderate	Moderate	Moderate	Low	Low	Low
Fouling Material	Very High	Very Low	Moderate	Moderate	Moderate	Moderate	Low	Low	Low
Pressure Drop	Very Low	Very Low	Low	Low	Low	High	Low	Low	High



2nd Step: Select and Size proper Inlet Device

Half Pipe has proven itself to be not only effective in large capacities but cost-effective as well and in many applications is preferred to Diffuser whose performance is superior but too costly.

Type of Device	None	Baffle	Elbow	Half Pipe	Diffuser	Cyclone
Momentum Reduction	Poor	Good	Good	Good	Good	Good
Bulk Separation	Good	Poor	Average	Average	Good	Good
Prevent Re-entrainment	Good	Average	Average	Average	Good	Average
Substantial Liquid in Gas	Poor	Ave/Poor	Average	Average	Good	Good
Prevent Liquid Shatter	Good	Poor	Poor	Average	Good	Good
Low Differential Pressure	Good	Good	Good	Good	Good	Average
Prevent Foam Creation	Poor	Poor	Poor	Poor	Average	Good
Gas Distribution	Poor	Average	Average	Poor	Good	Avg/ Poor
Prevent Liquid Surge Entrainment	Good	Good	Good	Poor	Good	Good
Orientation	H/V	H/V	H/T	H/V	H/V/T	H/T
Three Phase	Poor	Average	Average	No	Good	Good

It is also necessary to maintain the inlet velocity head, J , within proper limits for the selected inlet device to insure good gas distribution and minimum liquid shattering.

Where,

$$J = (\rho V^2)$$



The maximum mixed phase velocity head range used in the industry guidelines varies for the different inlet devices. Some typical maximums are:

- 6000-9000 max. typ, up to 15 000 max kg/m s² for diffuser distributor
- 975-2250 max kg/m. s² for no inlet distributor
- 1500-3750 max kg/m. s² for inlet half pipe or elbow distributor
- 1500-3750 max kg/m. s² for v-baffle or other simple inlet diverter designs

In addition, some users limit the inlet vapor phase velocity to 9 m/s or 18 m/s. The velocity should always be below the erosion velocity for the service.

In order to calculate head velocity, at first, we need to perform the followings:

1. Estimation of inlet nozzle ID; Consider inlet pipe ID near the vessel as first and best estimation.
2. Calculate ρ_{mixture} and subsequently V_{mixture}
3. Calculate J by multiplying $\rho_{\text{mixture}} \times (V_{\text{mixture}})^2$ and compare it with the last-page criterion.

Parameter	Value	Value	Unit
Estimated ID	34	36	inch
Nozzle Area	0.58	0.65	m ²
ρ_{mixture}	10.31	10.31	kg/m ³
V_{mixture}	21.38	19.07	m/s
J	4714	3751	kg/m.s ²
Criterion	3750	3750	kg/m.s ²

The licensor has selected 34 inch probably due to inlet piping diameter match the velocity requirement of the inlet to the separator 10 pipe diameters upstream of the separator to provide a flow regime which is fully developed before entering the separator.



Vapor Outlet Section

The sizing of the vapor outlet nozzle should be such that given the above placement of the mesh pad, the velocity is not high enough to cause channeling of the gas through the mesh pad. The nozzle outlet size is typically based on the lesser of that required for piping pressure drop, or a maximum velocity head criterion. Typical ranges for the maximum velocity head allowed for the vapor outlet are 4500–5400 kg/m • s². In addition, some users limit the absolute velocity to 18 m/s. The pipe size can be decreased to the appropriate size based on pressure drop considerations, 5-10 pipe diameters downstream of the separator, as required.

Parameter		Value	Value	Unit
Estimated ID	30	34	36	inch
Area	0.45	0.58	0.65	m ²
Vg	27.4	21.36	19.05	m/s
ρVg^2	7367	4465	3552	Kg/m. s ²
Criterion	4500	4500	4500	Kg/m. s ²



Liquid Outlet Nozzle

Many users limit the liquid outlet nozzle velocity based on pump suction line criteria

Liquid line type	ΔP (bar/km)		Max. Velocity. (m/s) (2)			
	Norm.	Max.	To 2"	3" to 6"	8" to 18"	from 20"
Pump suction						
- Liquid at bubble point with dissolved gas	0.6	0.9	0.6	0.9	1.2	1.5
- Non boiling liquid	2.3	3.5	0.9	1.2	1.5	1.8
Unit lines						
- Liquid at bubble point with dissolved gas	0.6	1.0	0.6	1.0	1.4	1.8
- Non boiling liquid	2.3	3.5	0.9	1.2	1.8	2.4

Parameter	Value	Value	Value	Unit
Estimated ID	3	4	6	inch
Area	0.004	0.008	0.018	m ²
VI	1.64	0.92	0.41	m/s
Criterion	Max 1.2	Max 1.2	Max 1.2	m/s



3rd Step: Calculate Vessel Diameter

Each and every licensor and company has developed a design basis procedure for sizing vessels. In this article, a GPSA-based method, Foster-Wheeler-based method and the Licensor method will be explored.

GPSA

1. Use the following equation and next-page K-values to calculate terminal velocity

$$U_T = K \sqrt{\frac{(\rho_L - \rho_V)}{\rho_V}}$$

where

$$where K = \sqrt{\frac{4gD_p}{3C_D}}$$

According to GPSA, thanks to the fact that a vertical vessel without demister pad has been chosen, a K value of 0.046 is selected.



Parameter	Value	Unit
ρ_l	903	kg/m ³
ρ_v	9.78	kg/m ³
K_{selected}	0.046	
U_g	0.43	m/s
Q_g	12.51	m ³ /s
ID	6022	mm
Required-ID	6022	mm
Selected-ID	6000	mm

Notes

For ID calculation, the following equation has been utilized.

$$D_{VD} = \sqrt{\frac{4 Q_V}{\pi U_V}}$$

The selected ID is not in harmony with the Licensor selected ID, which is 3750 mm.



Foster-Wheeler

The basis of sizing is the critical velocity V_c (m/s)

$$V_c = 0.048 \left(\frac{\rho_l - \rho_g}{\rho_g} \right)^{0.5}$$

The maximum gas velocity is $K \times V_c$

K is a coefficient depending on the service, and the use or the absence of wire mesh.

Recommended K values are given hereafter for different services.

Service	Without wire mesh	With wire mesh
Production separator	1.7	2.2
Fuel gas drum	0.8	1.7
Compressor suction drum	0.8	1.7
Glycol or amine contactor inlet drum	0.8	1.7
Reflux drum	1.7	2.2
Steam drum	-	1.3

If a vane pack internal is used, the recommended K value is 3.3.



Parameter	Value	Unit
ρ_l	903	kg/m ³
ρ_v	9.78	kg/m ³
K_{selected}	1.7	
V_c	0.45	m/s
V_{max}	0.78	
Q_g	12.51	m ³ /s
ID	4521	mm
Required-ID	4521	mm
Selected-ID	4500	mm



Svercheck-Method

1. Use the following equation and next-page K-values to calculate terminal velocity

$$U_T = K \sqrt{\frac{(\rho_L - \rho_V)}{\rho_V}}$$

where

$$where K = \sqrt{\frac{4gD_p}{3C_D}}$$

Notes

For ID calculation, the following equation has been utilized.

$$D_{VD} = \sqrt{\frac{4Q_V}{\pi U_V}}$$

$$U_V = 0.75 U_T$$



Svercheck Method-K value

$$K = 0.35 - 0.01 (364.5 - 100/100) = 0.3235$$

For vertical vessel without mist eliminator

$$K_{\text{selected}} = 0.32/2 = 0.16$$

Table 1. Separator K values.

Mist Eliminator

$1 \leq P \leq 15$	$K = 0.1821 + 0.0029P + 0.0460 \ln(P)$	
$15 \leq P \leq 40$	$K = 0.35$	$P, \text{ psia}$
$40 \leq P \leq 5,500$	$K = 0.430 - 0.023 \ln(P)$	

GPSA

$0 \leq P \leq 1,500$	$K = 0.35 - 0.01(P - 100/100)$	$P, \text{ psig}$
-----------------------	--------------------------------	-------------------

- Most vapors under vacuum $K = 0.20$.
- For glycol and amine solutions, multiply K by 0.6-0.8.
- For vertical vessels without mist eliminators, divide K by 2.
- For compressor suction scrubbers, mole sieve scrubbers and expander inlet separators multiply K by 0.7-0.8.

Theoretical (no mist eliminator)

$$K = \sqrt{\frac{4gD_p}{3C_D}}$$

$$C_D = \exp(Y)$$

$$Y = 8.411 - 2.243X + 0.273X^2 - 1.865E - 2X^3 + 5.201E - 4X^4$$

$$X = \ln\left(\frac{0.95 + 8\rho_v D_p^3 (\rho_L - \rho_v)}{\mu_v^2}\right)$$

Notes:

D_p , ft

ρ , lb/ft³

μ , cP

1 micron = 3.28084×10^{-6} ft



Parameter	Value	Unit
ρ_l	903	kg/m ³
ρ_v	9.78	kg/m ³
K_{selected}	0.16	
U_g	1.52	m/s
U_v	1.14	
Q_g	12.51	m ³ /s
ID	3728	mm
Required-ID	3728	mm
Selected-ID	3750	mm



Explanation, Comparison and Discussion

Different criteria have been used to size the vary separator and the difference in diameter results stem from the selected K that each licensor or criterion has set based on their experience. The following table provides the K value and diameter calculated.

Method	GPSA	FW	Svercheck	Licensor
K-Value	0.046	0.0816	0.12	0.12
Diameter	6000	4000	3750	3750



4th Step: Height Calculation


Each and every licensor and company has developed a design basis procedure for sizing vessels. In this article, a GPSA-based method, Foster-Wheeler-based method and the Licensor method will be explored.

GPSA

Dim	Section	Distance	
H ₁	Bottom Tangent to LLLL	300–450 mm, can be lower depending on instrument mount	
H ₂	LLLL to HHLL	Per required surge time or retention time	
H ₃	HHLL to Feed Nozzle Bottom	300–600 mm for diffuser 0.25 D for all other inlet devices, with 600 mm minimum	
H ₄	Nozzle Diameter	Larger of piping size or velocity head criteria	
H ₅	Nozzle Top to Mist Eliminator Bottom	300–900 mm for diffuser 0.5D for all other inlet devices	
H ₆	Mist Eliminator	100-150 mm typical	
H ₇	Mist Eliminator to Top Tangent	150 mm minimum or per Fig. 7-38	




Retention/Surge Time

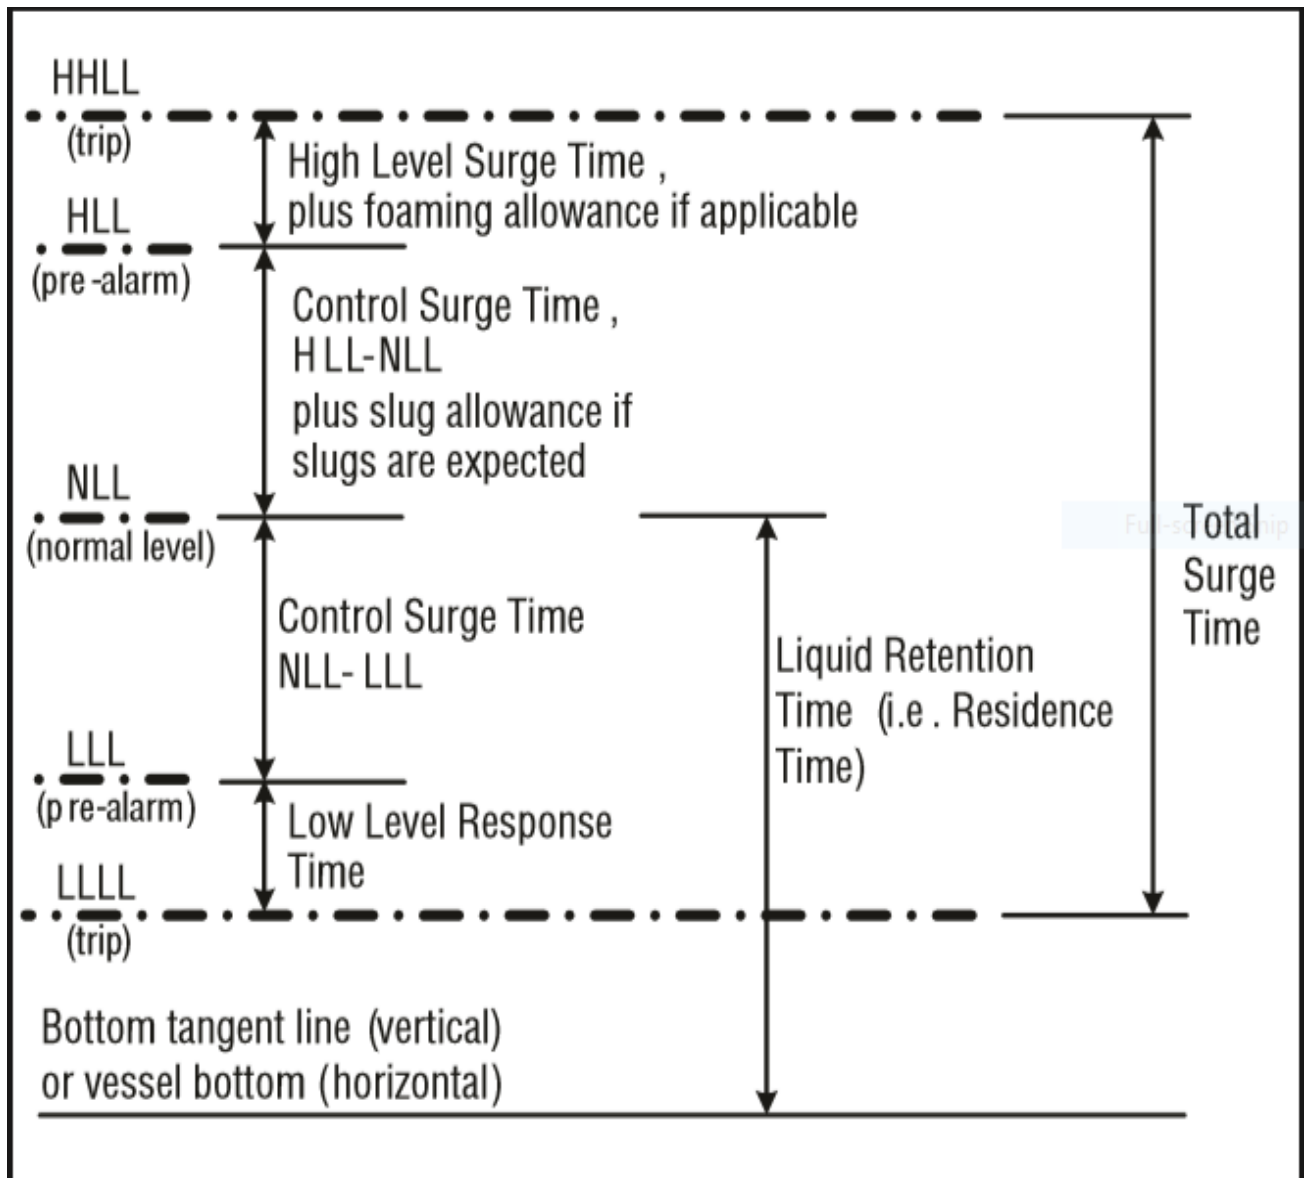



Service	Control Surge Time LLL to HLL	Retention time
Compressor Drum	2 minutes	—
Flash Drum	2-5 minutes	—
Reflux Drum	5 minutes on product plus reflux	—
Surge Drum Upstream of a Tower	5-10 minutes	—
Surge Drum Upstream of a Fired Heat	10 minutes	—
Net Product to Storage	5 Minutes	
Amine Flash Drum	—	5-10 minutes, depending on presence of hydrocarbons
Glycol Flash Drum	—	10-20 minutes depending on presence of hydrocarbons
Refrigeration Accumulator	5 minutes, or based on system or storage requirements	—
Refrigeration Economizer	3 minutes	—
Heat Medium Surge Drum	Maximum liquid expansion, based on 25% to 75% full	—

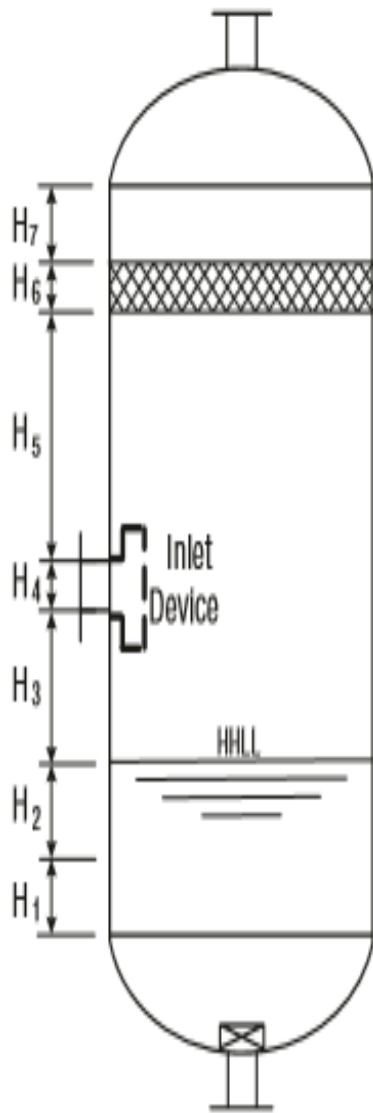

Height Elements	GPSA	LICENSOR	Unit
H1	450	500	mm
H2	100	400	mm
H3	1500	695	mm
H4	865	865	mm
H5	3000	2400	mm
H6	-	-	mm
H7	-	-	mm
HT	5915	4850	mm



Calculation, Explanation, and Discussion

H1 mostly depends on instrument mount position and the number of instrument devices used.

The Licensor for most of his vertical vessel has selected 500 mm in accord with his FCS and ESD Control System, whereas in GPSA 450 mm is selected as the basis.

H2 is a function of retention time. It seems from the back-calculation that the licensor has selected 10minutes for retention time. Likewise, in GPSA a retention time of 2-5 minutes has been selected for Flash drums. The licensor general retention time table is given in next-page

H3 in GPSA for Half Open pipes is $0.25D$ and has been the basis for calculation.

H4 is the size of inlet Half Open pipe which is the same size of upstream pipe for both licensor and GPSA.

H5 in GPSA for Half Open pipes is $0.5D$ and has been the basis for calculation.

H6 is the demister pad thickness which is 150 mm for both licensor and GPSA.


H7 in GPSA is minimum 150 mm but in other sketch in GPSA there is a formula for X4 which connects the upper part of demister pad to outlet nozzle which can not be used for comparison here.



Retention Time provided by the licensor

Hydraulic retention time (hold up requirements) is defined between low level (LL) and high level (LH).

Type of service	Retention time
Feed surge drum	30 minutes
Reflux only	5 minutes
Column feed	
on flow control	15 minutes
on cascade level/flow control	8 minutes
Reboiling by fired heater on feed to heater	8 minutes
Reboiling by thermo siphon on circulation	10 to 30 seconds
Products to storage	
without pump	5 minutes
with pump	7 minutes
Feeds and products feeding another unit	
on flow control	15 minutes
on cascade/level flow control	8 minutes
Tanks	Individually, according to the agreement
Steam drum (LL to empty), min	
From high level to empty	12 minutes
From low level to empty	10 minutes
Deaerator, min	15 minutes

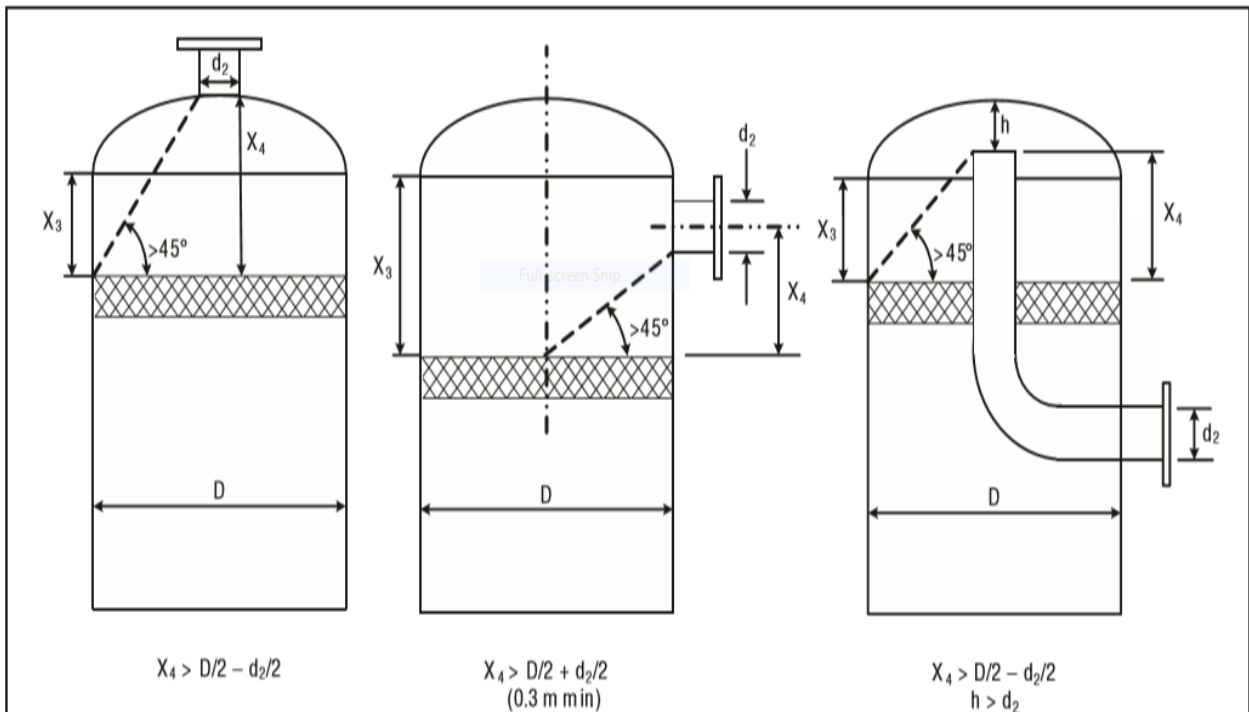




Foster-Wheeler

SERVICES	TIME (MINUTES)
Feed Surge Drum	
A. to heater	5
B. to others	3 without pump
	5 with pump
Reflux Drum	5
Fractionation tower bottom : the largest of	
A. product to next process	5
B. product to other column	5
C. product to storage tank	3 without pump
	5 with pump
Steam flash drum (process units)	5
Steam drum (utility generation)	10
Desalter	15
Deaerator (note1)	15
Atmospheric degassing drum	15
Others Drums	3 without pump
	5 with pump



DATA SHEET SYMBOL	VERTICAL DRUM	HORIZONTAL DRUM
HHLA/HHLS (HLL)		
	at least 1 to 2 min. <u>with</u> 150 mm min. to verify : min. 10% of control range IF only HLL : HLA-HLL : 10% of control range	at least 1 to 2 min. <u>with</u> 100 mm min. to verify : min. 10% of control range IF only HLL : HLA-HLL : 10% of control range
HLA		
	liquid hold up time to be considered <u>with</u> 300 mm min.	liquid hold up time to be considered <u>with</u> 300 mm min.
LLA		
	at least 1 to 2 min. <u>with</u> 200 mm min. to verify : min. 10% of control range IF only LLL : LLA-LLL : 10% of control range	at least 1 to 2 min. <u>with</u> 100 mm min. to verify : min. 10% of control range IF only LLL : LLA-LLL : 10% of control range
LLLA/LLLS (LLL)		
	300 mm min., but to be compatible with time required to close a SDV	150 mm min., but to be compatible with time required to close a SDV
Tangent line (1)		

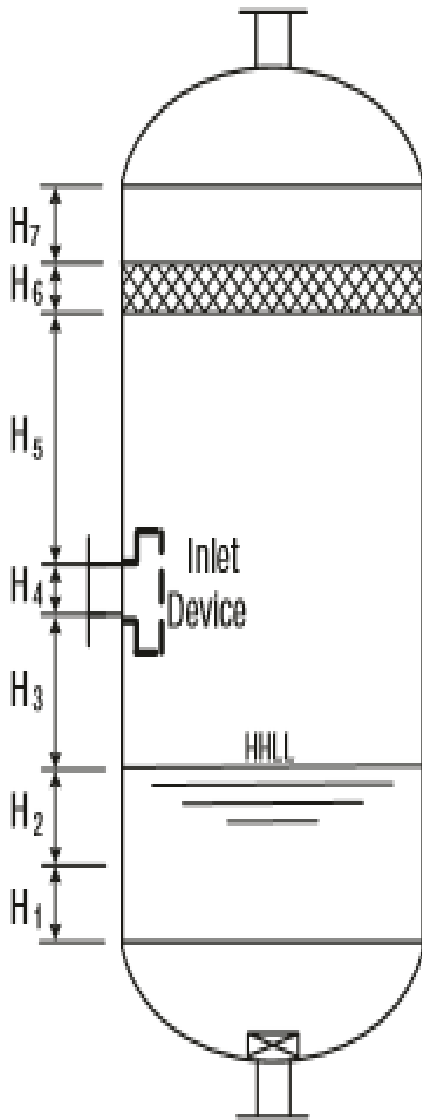

Height Elements	FW	LICENSOR	Unit
H1	300	500	mm
H2	150	400	mm
H3	-	695	mm
H4	865	865	mm
H5	-	2400	mm
H6	-	-	mm
H7	-	-	mm
HT	-	4850	mm



Svercek Method

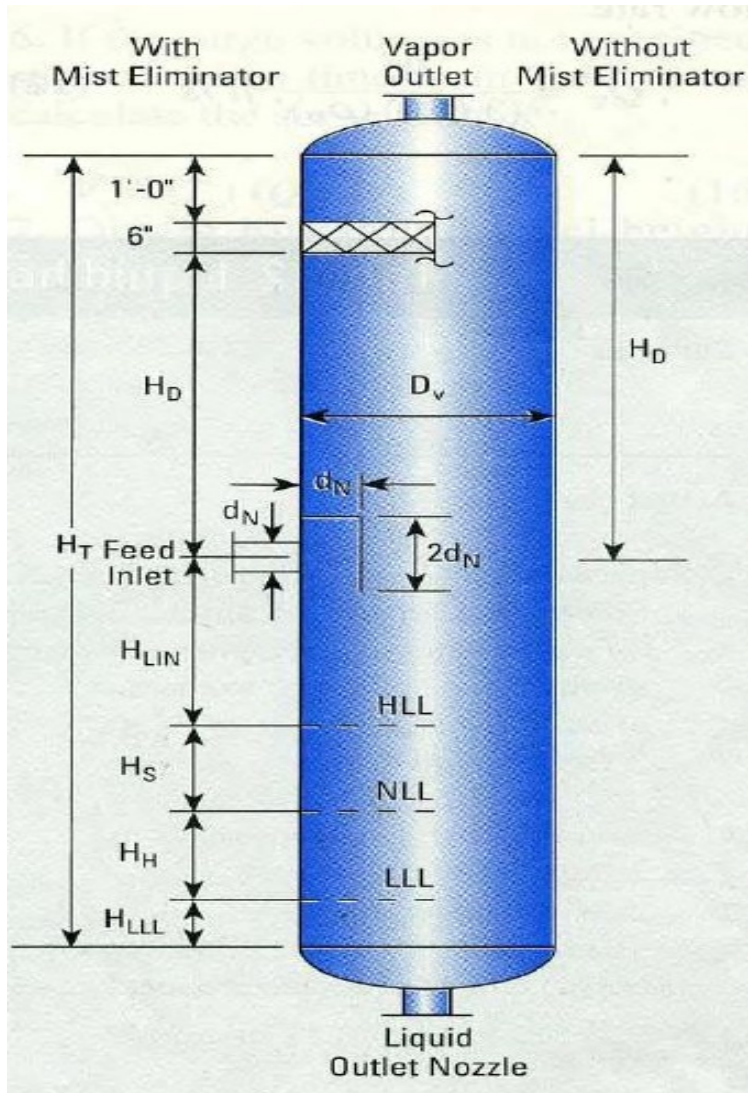


Table 3. Low liquid level height.

Vessel diameter	Vertical LLL		Horizontal LLL
	< 300 psia	> 300 psia	
≤ 4 ft	15 in.	6 in.	9 in.
6 ft	15 in.	6 in.	10 in.
8 ft	15 in.	6 in.	11 in.
10 ft	6 in.	6 in.	12 in.
12 ft	6 in.	6 in.	13 in.
16 ft	6 in.	6 in.	15 in.

10. Calculate the height from high liquid level to the centerline of the inlet nozzle:

$$H_{LIN} = 12 + d_N, \text{ in. (with inlet diverter)}$$

$$H_{LIN} = 12 + \frac{1}{2} d_N, \text{ in. (without inlet diverter)} \quad (19)$$

$$H_D = 0.5 D_V \text{ or a minimum of}$$


$$H_D = 36 + \frac{1}{2} d_N, \text{ in. (without mist eliminator)} \quad (20)$$

$$H_D = 24 + \frac{1}{2} d_N, \text{ inches (with mist eliminator)}$$



Table 2. Liquid holdup and surge times.

Services	Holdup Times (NLL-HLL) min.	Surge Time (NLL-LLL) min.	
A. Unit Feed Drum	10	5	
B. Separators			
1. Feed to column	5	3	
2. Feed to other drum or tankage			
a) with pump or through exchanger	5	2	
b) without pump	2	1	
3. Feed to fired heater	10	3	
C. Reflux or product accumulator			
1. Reflux only	3	2	
2. Reflux and product	3+	2+	
• based on reflux (3 min.) + appropriate holdup time of overhead product (per B-1, 2,3)			
D. Column bottoms			
1. Feed to another column	5	2	
2. Feed to other drum or tankage			
a) with pump or through exchanger	5	2	
b) without pump	2	1	
3. Feed to fired boiler	5-8	2-4	
• based on reboiler vapor expressed as liquid (3 min.) + appropriate holdup time for the bottom product (per D-1, 2)			
E. Compressor suction/interstage scrubber			
• 3 min between <i>HLL (HLA)</i> and <i>HLSD</i>			
• 10 min from bottom tangent line to <i>HLA</i>			
F. Fuel gas knockout drum			
• 20 ft slug in the incoming fuel gas line between <i>NLL</i> and <i>HLSD</i>			
G. Flare knockout drum			
• 20 to 30 min. to <i>HLL</i>			
Personnel	Factor	Instrumentation	Factor
Experienced	1.0	Well instrumented	1.0
Trained	1.2	Standard instrumented	1.2
Inexperienced	1.5	Poorly instrumented	1.5

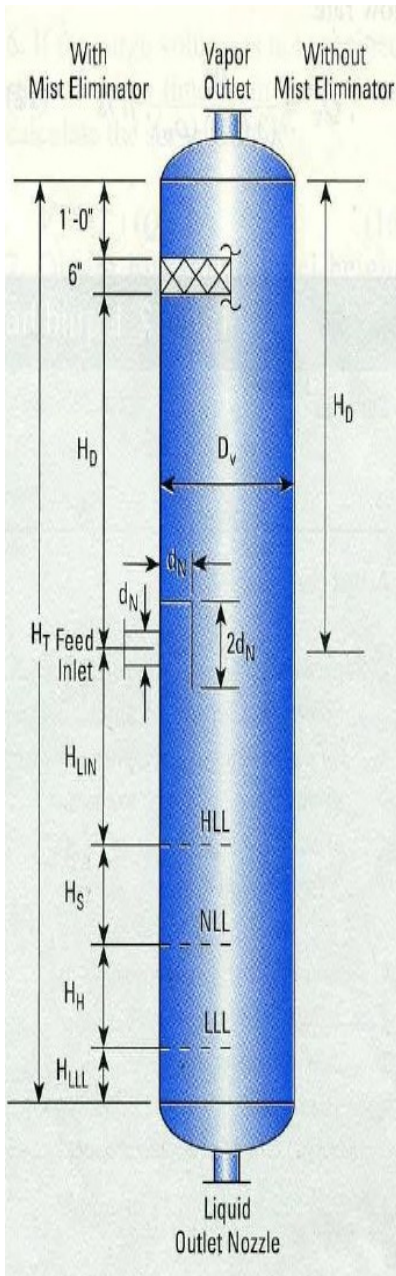

Height Elements	Svercek	LICENSOR	Unit
HLLL	150	500	mm
HH	125	400	mm
Hs	200	695	mm
HLIN	1200	865	mm
HD	1875	2400	mm
H6	-	-	mm
H7	-	-	mm
HT	3550	4850	mm



Method	GPSA	FW	Svercek	Licensor
Height	5915	-	3550	4850
Diameter	6000	4500	3750	3750
Volume				



Manholes, Drain and Vents

Foster-Wheeler

Size of manholes

For vessel diameter < 1000 mm

Flanged vessel shall be considered if equipment contains internals

Otherwise, size of manholes = 18"

For vessel diameter \geq 1000 mm

Toxic service size of manholes = 24"

Non-toxic service size of manholes = 20"

(Or up to 24" if internals need to be removable through manhole.)

The drain of the vessel shall always be at the lowest point of a vessel. For vertical vessels they shall be connected to the bottom outlet line at the low point. For horizontal vessels the drain point shall be directly on the bottom of the drum at the lowest point ensured through vessel slope (1:100).

Volume or diameter of vessel (m ³ or mm)	Vent diameter	Drain diameter
$V \leq 15$ OR $D \leq 2500$	2"	2"
$15 < V \leq 75$ or $2500 < D \leq 4500$	2"	3"
$75 < V \leq 220$ or $4500 < D \leq 6000$	3"	4"
$220 < V \leq 420$ or $D > 6000$	4"	4"
$V > 420$	6"	4"



Licenser Criteria

Manhole

Manhole size	24 inches (*1)
--------------	----------------

Manhole installation for tray tower:

For tray towers, manholes are to be provided at top, bottom, feed point and draw-off point of tower and for each 20 trays or 15 m elevation distance, whichever is the shorter distance, as minimum.

(*1) In case there is restriction for diameter, minimum 20" should be used.

Hand hole or inspection hole

Preferable size	8 inches
Minimum size	6 inches

Vent and drain

Vent and drain for vessels will normally be provided at the minimum length on overhead or bottom line in accordance to the following table:

Volume or diameter of vessel (m ³ or mm)	Vent diameter (inches)	Drain diameter (inches)
V < 75 or D <= 4,500	2	2
75 < V <= 220 4,500 < D <= 6,000	3	3
20 < V <= 420 or D > 6,000	4	4
V > 420	6	4

Note: Vent and drain connections are not necessarily located on vessels.



Comparison

1. The size of manhole for both licensor and FW is 24'.
2. There is no need to have Vent on this drum since there is a control valve to flare system and if purging is required then by use of these means the task could be performed.
3. The drain valve sized by licensor is 2' and but by Foster-Wheeler is 3'

Parameter	FW	Licensor
Manhole	20-24	24
Vent	2	2
Drain	3	2
Vortex Breaker	Yes	Yes